Commodore CBM8032 Business Keyboard

1. This information was retrieved from a CBM8032 Business Keyboard
2. It most probably applies to other (CBM80xx/40xx) business keyboards as well
3. The keyboard layout might vary for other languages, the matrix map is positional and relates to the shown layout

← ! 1 " 2 # 3 $ 4 % 5 & 6 ' 7 (8) 9 0 * : = - ↑ CRSR RUN STOP
TAB Q W E R T Y U I O P [\ CRSR INST DEL
ESC SHIFT LOCK A S D F G H J K L + ; @] RETURN
OFF RVS SHIFT Z X C V B N M < , > . ? / SHIFT REPEAT CLR HOME
SPACE
7 8 9
4 5 6
1 2 3
0 KP .

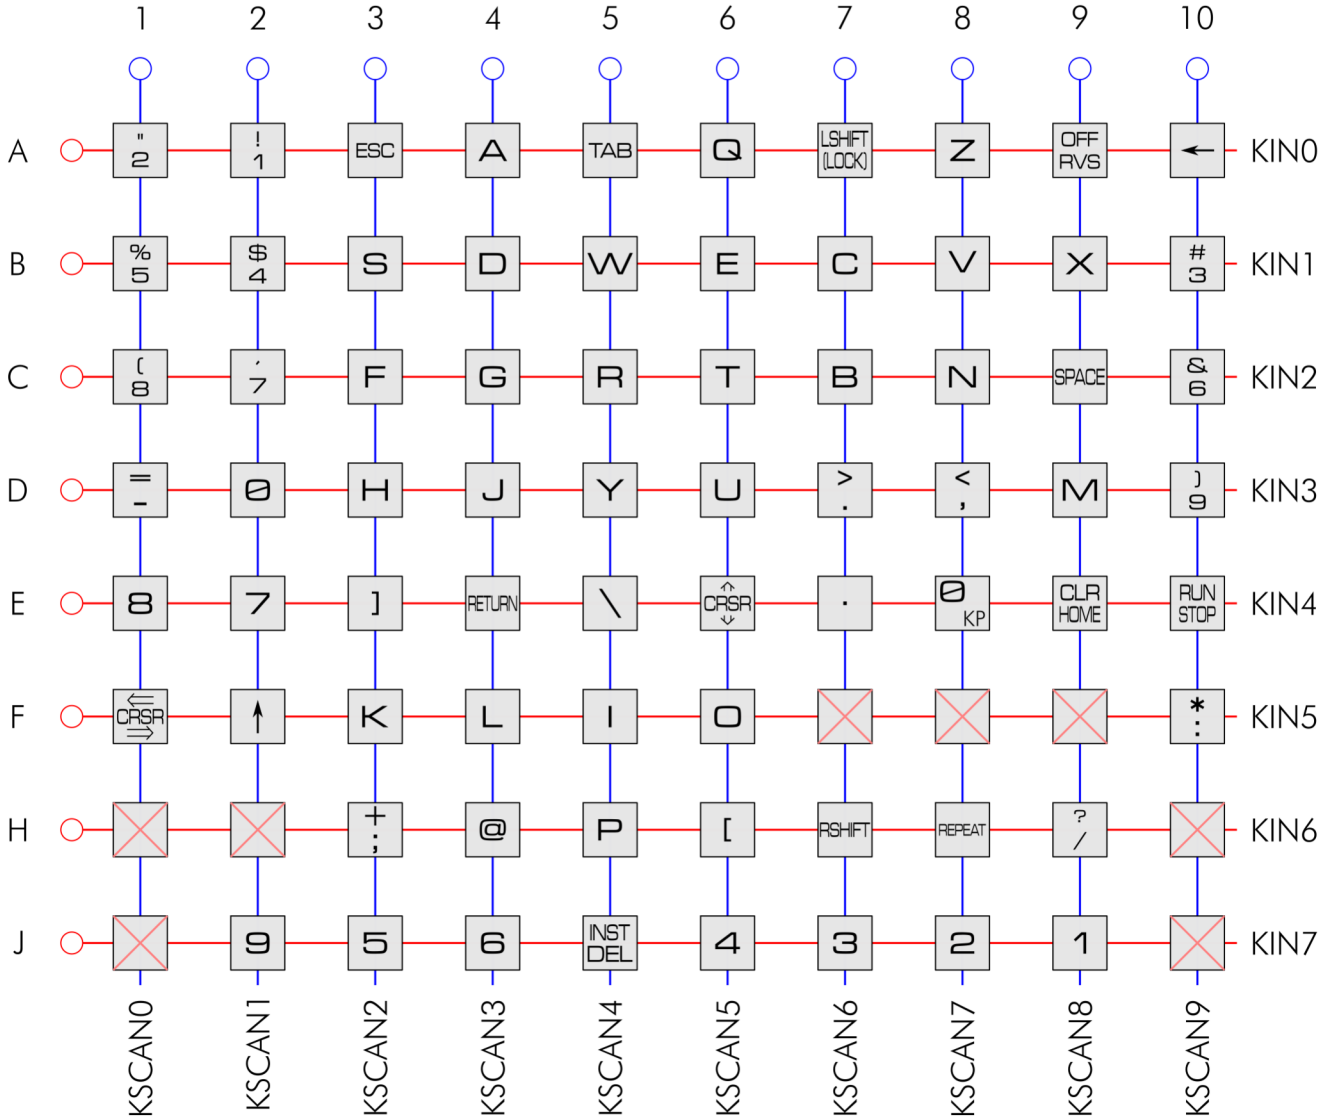
1 2 3 4 5 6 7 8 9 10
A " 2 ! 1 ESC A TAB Q LSHIFT (LOCK) Z OFF RVS ← KIN0
B % 5 $ 4 S D W E C V X # 3 KIN1
C (8 ' 7 F G R T B N SPACE & 6 KIN2
D = - 0 H J Y U > . < , M) 9 KIN3
E 8 7] RETURN \ CRSR . 0 KP CLR HOME RUN STOP KIN4
F CRSR ↑ K L I O * : KIN5
H + ; @ P [RSHIFT REPEAT ? / KIN6
J 9 5 6 INST DEL 4 3 2 1 KIN7
KSCAN0 KSCAN1 KSCAN2 KSCAN3 KSCAN4 KSCAN5 KSCAN6 KSCAN7 KSCAN8 KSCAN9

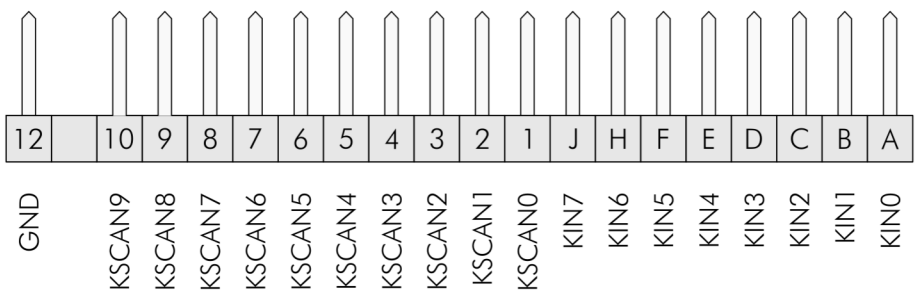
12 10 9 8 7 6 5 4 3 2 1 J H F E D C B A
GND KSCAN9 KSCAN8 KSCAN7 KSCAN6 KSCAN5 KSCAN4 KSCAN3 KSCAN2 KSCAN1 KSCAN0 KIN7 KIN6 KIN5 KIN4 KIN3 KIN2 KIN1 KIN0

若い戦士

Sven Petersen
2022